





STONEHOSE

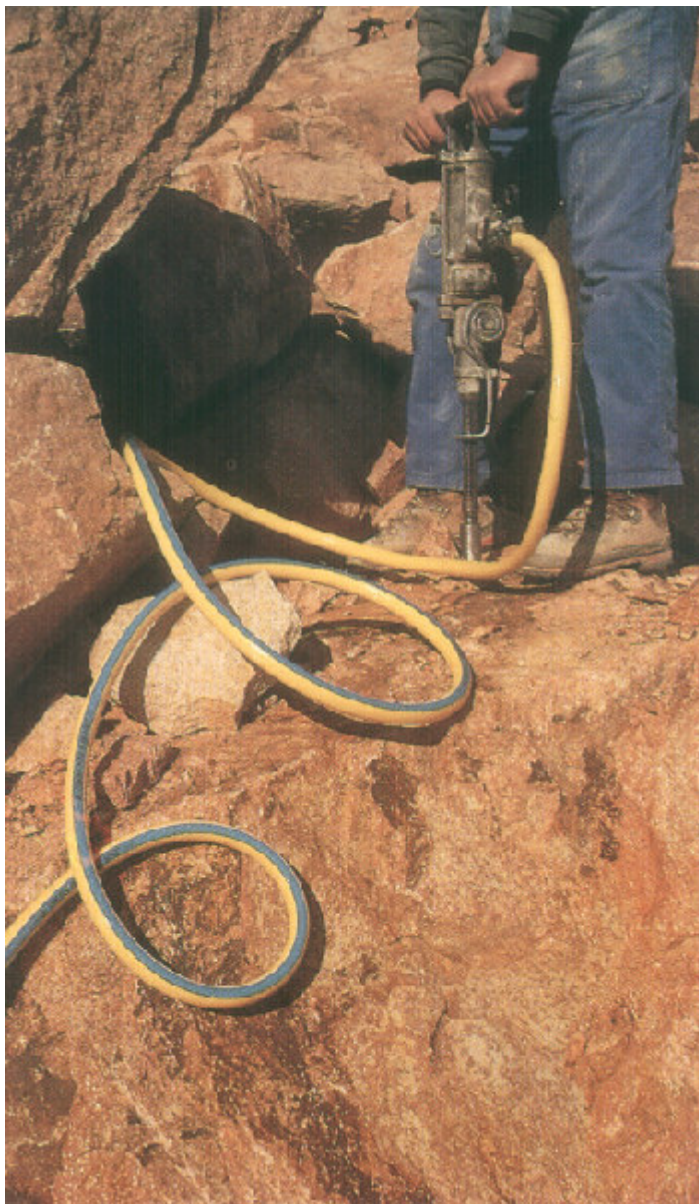

PRIMJENA

komprimirani zrak - zbog otpornosti na habanje koristi se naročito u kamenolomima

UNUTARNJI SLOJ:

mješavina PVC - NBR guma crne boje

OJAČANJE:

poliesterska mreža (2 sloja)

VANJSKI SLOJ:

mješavina PVC - PU žuto plave boje

TEMPERATURA:

-15 +60 °C

Promjer (mm)	Tlak (bar)	Rasprs. tlak (bar)	Težina (kg/m)	Kolut (m)	Montaža
					Stezaljke
19 x 27	20	75	0.390	20 – 40 - 60	20 x 29 Fe/Zn
25 x 35	20	75	0.640	20 – 40 - 60	32 x 40 Fe/Zn