



URANO PU

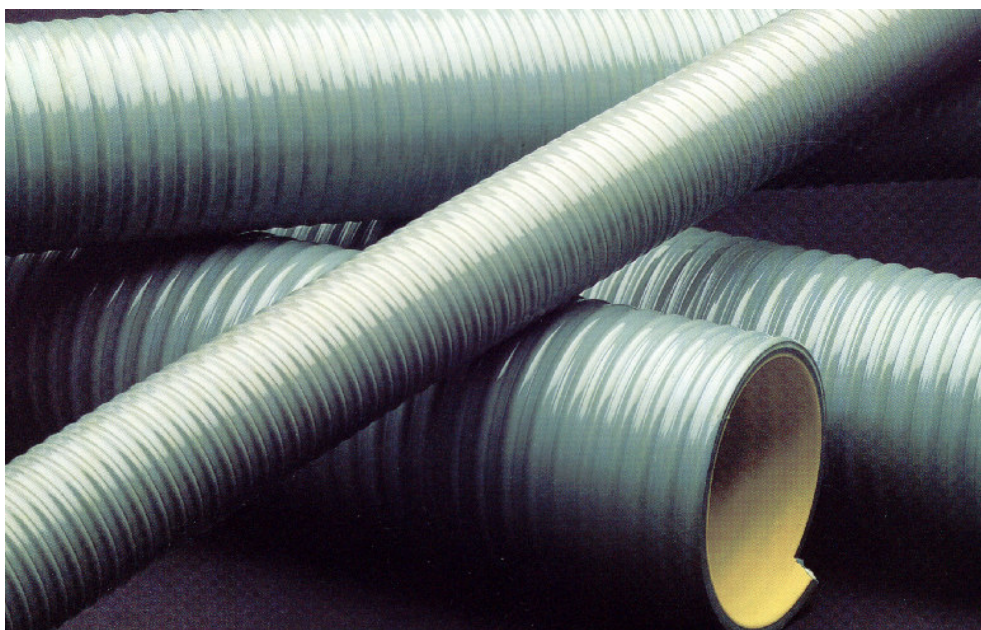

PRIMJENA
UNUTARNJI SLOJ:
OJAČANJE:
VANJSKI SLOJ:
TEMPERATURA:

usis i transport šljunka, cementa, pijeska i drugih abrazivnih materijala
 antiabrazivni PU žute boje
 spirala od tvrdog PVC-a otpornog na udarce
 plastificirani PVC sivo-zelene boje
 -20 +60 °C

Promjer (mm)	Debljina PU sloja (mm)	Tlak (bar)	Podtlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)	Montaža	
							Stezaljke	
32 x 41	1.0	6.0	0.70	0.600	130	50	39 - 49 Fe/Zn	-
38 x 48	1.0	9.0	0.90	0.800	228	50	39 - 49 Fe/Zn	
45 x 55	1.0	8.5	0.90	1.000	270	50	48 - 60 Fe/Zn	
50 x 61	1.1	5.0	0.90	1.000	200	30	60 - 76 Fe/Zn	BAND - IT
60 x 70	1.1	4.5	0.90	1.250	240	30	60 - 76 Fe/Zn	
63 x 74	1.1	4.5	0.90	1.400	260	30	60 - 76 Fe/Zn	
70 x 82	1.1	4.5	0.90	1.600	280	30	77 - 94 Fe/Zn	
76 x 88	1.1	4.0	0.90	1.700	310	30	77 - 94 Fe/Zn	
80 x 92	1.1	3.5	0.90	1.850	320	30	77 - 94 Fe/Zn	
90 x 102	1.1	3.5	0.90	2.150	360	30	94 - 115 Fe/Zn	
100 x 114	1.2	3.0	0.85	2.700	410	30	115 - 145 Fe/Zn	
110 x 124	1.2	3.0	0.85	3.000	450	30	115 - 145 Fe/Zn	
120 x 134	1.2	2.5	0.80	3.350	480	30	115 - 145 Fe/Zn	
127 x 145	1.2	2.5	0.80	3.600	510	20	125 - 153 Fe/Zn	
150 x 167	1.2	2.0	0.80	5.000	610	20	150 - 182 Fe/Zn	

Napomena: Cijevi unutarnjih promjera 50 i većih moguće je isporučiti sa ugrađenom bakrenom pletenicom (radi antistatičnosti)