


## CALORFLAT

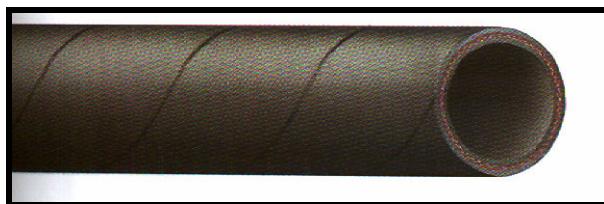

<b>PRIMJENA:</b>	tlak tople vode, rashladnih tekućina i sredstava protiv zamrzavanja (glycol)
- koriste se kod automobilskih hladnjaka i za ispuste	
<b>UNUTARNJI SLOJ:</b>	glatka SBR guma crne boje
<b>OJAČANJE:</b>	sintetska mreža
<b>VANJSKI SLOJ:</b>	hrapava NBR guma crne boje otporna na habanje, toplinu i ulje
<b>TEMPERATURA.</b>	-40 +100 °C

Promjer (mm)	Radni tlak (bar)	Rasprs. tlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)	Montaža	
						Obujmice	
10 x 16	3	10	0.21	60	40	9	12 – 20 Fe/Zn
12 x 18	3	10	0.21	120	40	9	12 – 20 Fe/Zn
13 x 19	3	10	0.21	130	40	9	12 – 20 Fe/Zn
14 x 20	3	10	0.22	140	40	12	16 – 25 Fe/Zn
15 x 21	3	10	0.23	150	40	12	16 – 25 Fe/Zn
18 x 24	3	10	0.25	180	40	12	16 – 25 Fe/Zn
20 x 26	3	10	0.27	200	40	12	20 – 32 Fe/Zn
22 x 28	3	10	0.29	220	40	12	20 – 32 Fe/Zn
25 x 32	3	10	0.39	250	40	12	20 – 32 Fe/Zn
28 x 36	3	10	0.50	280	40	12	35 – 50 Fe/Zn
30 x 38	3	10	0.53	300	40	12	35 – 50 Fe/Zn
32 x 40	3	10	0.57	320	40	12	35 – 50 Fe/Zn
35 x 43	3	10	0.61	350	40	12	35 – 50 Fe/Zn
38 x 47	3	10	0.75	380	40	12	35 – 50 Fe/Zn
40 x 49	3	10	0.79	400	40	12	35 – 50 Fe/Zn
42 x 51	3	10	0.82	420	40	12	40 – 60 Fe/Zn
45 x 54	3	10	0.87	450	40	12	40 – 60 Fe/Zn
48 x 57	3	10	0.96	480	40	12	40 – 60 Fe/Zn
51 x 61	3	10	1.10	500	40	12	50 – 70 Fe/Zn
55 x 65	3	10	1.20	550	40	12	50 – 70 Fe/Zn
60 x 70	3	10	1.25	600	40	12	60 – 80 Fe/Zn
65 x 75	3	10	1.42	650	40	12	60 – 80 Fe/Zn
70 x 81	3	10	1.75	700	40	12	70 – 90 Fe/Zn
76 x 87	3	10	1.84	760	40	12	70 – 90 Fe/Zn
80 x 92	3	10	2.03	800	40	12	80 – 100 Inox
90 x 102	3	10	2.32	900	40	12	100 – 120 Inox
100 x 113	3	10	2.72	1000	40	12	100 – 120 Inox