
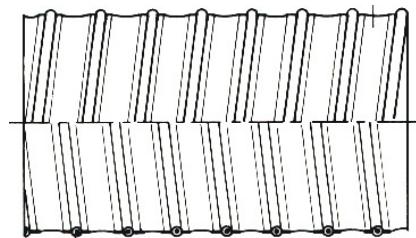


VENTGAS

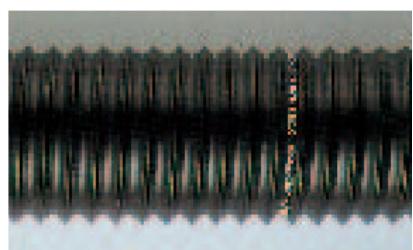

PRIMJENA

MATERIJAL CIJEVI: usis kemijski agresivnih plinova i para, te zraka

crna termoplastična guma debljine stjenke 0,4 mm

čelična pocićana spirala obložena termoplastičnom gumom

OJAČANJE:
TEMPERATURA:

-40 +150 °C

Promjer (mm)	Tlak (bar)	Podtlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)
40	0.35	0.15	0.160	40	
45	0.35	0.12	0.180	45	
50	0.35	0.10	0.210	50	
60	0.35	0.08	0.250	60	
63	0.35	0.08	0.270	63	
70	0.30	0.08	0.290	75	
75	0.20	0.07	0.310	76	
80	0.20	0.06	0.330	80	
90	0.17	0.06	0.410	90	
100	0.15	0.05	0.560	100	
110	0.15	0.05	0.610	110	
120	0.15	0.04	0.670	120	
125	0.13	0.04	0.700	125	
130	0.12	0.04	0.720	130	
140	0.12	0.04	0.730	140	
150	0.11	0.04	0.780	150	
160	0.10	0.03	0.800	160	
170	0.09	0.03	0.820	170	
180	0.08	0.03	0.910	180	
200	0.08	0.02	1.270	200	
250	0.07	0.02	1.350	250	
300	0.05	0.01	1.450	300	

6, 10, 15