


VENTSIL

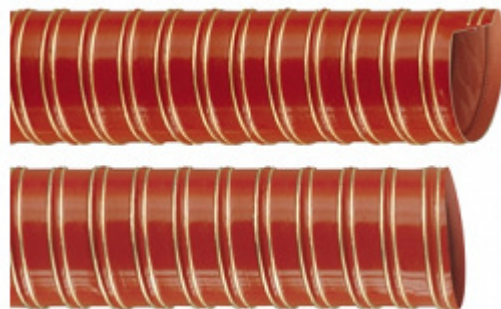

PRIMJENA

MATERIJAL CIJEVI:

OJAČANJE:

TEMPERATURA:

usis i tlak vrućeg zraka i plinova - koriste se naročito u automobilske i avionske industriji, te industriji plastike
sloj staklenih vlakana presvučen slojem silikona crvene boje
ugrađena čelična spirala, a izvana vrpca od silikonskih vlakana
-80 +250 °C (max 300 °C)

Promjer (mm)	Podtlak (bar)	Tlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)
19	0.5	1.7	0.080	6	10
25	0.5	1.4	0.120	12	4
32	0.5	1.4	0.130	16	4
38	0.5	1.4	0.165	19	4
40	0.5	1.3	0.177	21	4
51	0.4	1.2	0.250	25	4
63	0.4	1.1	0.300	31	4
70	0.4	1.1	0.395	35	4
76	0.5	1.1	0.410	25	10
80	0.5	1.1	0.450	27	10
83	0.3	1.0	0.470	41	4
90	0.3	0.9	0.495	44	4
102	0.3	0.9	0.570	51	4
115	0.5	0.9	0.720	42	10
120	0.2	0.8	0.760	60	4
127	0.2	0.8	0.805	63	4
152	0.1	0.6	1.050	76	4
160	0.1	0.6	1.090	80	4
180	0.1	0.6	1.210	89	4
203	0.1	0.5	1.380	101	4
254	0.1	0.4	1.650	127	4
305	0.1	0.1	2.000	152	4