
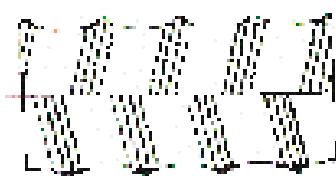


# VULCANO PU

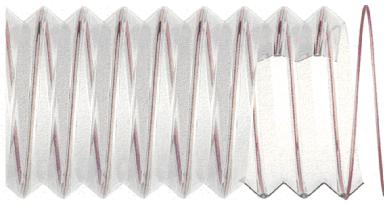

**PRIMJENA**

**MATERIJAL CIJEVI:** usis i prolaz prašine, piljevine, otpiljaka, ventilacija (L), granulata i abrazivnih materijala (M i H)

**plastificirani prozirni PU na bazi estera iznutra valovit (L) ili gladak (M i H)**

**OJAČANJE:** čelična spirala (pocinčana kod tipa L, a pobakrena kod tipova M i H)

**TEMPERATURA:** -40 +90 °C

Promjer [mm]	Debljina stjenke (mm)			Podtlak (bar)			Težina (kg/m)			Polumjer savijanja (mm)			Kolut (m)		
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
38	-	0.9	2.0	-	0.50	0.97	-	0.300	0.715	-	40	150	-	20	15
40	-	0.9	-	-	0.50	-	-	0.315	-	-	50	-	-	20	-
45	-	0.9	2.0	-	0.50	0.97	-	0.390	0.835	-	50	180	-	20	15
51	0.4	0.9	2.0	0.04	0.40	0.97	0.230	0.440	1.030	26	60	204	10	20	15
60	0.4	0.9	2.0	0.04	0.40	0.97	0.270	0.510	1.210	30	70	240	10	20	15
63	0.4	0.9	2.0	0.04	0.40	0.97	0.285	0.530	1.265	32	70	250	10	20	15
65	0.4	-	-	0.04	-	-	0.295	-	-	33	-	-	10	-	-
70	0.4	0.9	-	0.04	0.40	-	0.360	0.675	-	35	80	-	10	20	-
76	0.4	0.9	2.0	0.04	0.35	0.95	0.390	0.740	1.545	38	90	305	10	20	15
80	0.4	0.9	2.0	0.04	0.35	0.95	0.410	0.775	1.625	40	90	320	10	20	15
90	0.4	0.9	2.0	0.04	0.30	0.95	0.450	0.865	1.820	45	100	360	10	20	15
100	0.4	-	-	0.03	-	-	0.510	-	-	50	-	-	10	-	-
102	0.4	0.9	2.0	0.03	0.25	0.95	0.520	0.955	2.195	51	120	410	10	15	10
110	0.4	0.9	-	0.03	0.25	-	0.560	1.045	-	55	130	-	10	15	-
120	0.4	0.9	-	0.03	0.20	-	0.610	1.135	-	60	140	-	10	15	-
127	0.4	0.9	2.0	0.03	0.20	0.90	0.640	1.375	2.910	64	150	510	10	15	10
130	0.4	-	-	0.02	-	-	0.660	-	-	65	-	-	10	-	-
140	0.4	0.9	2.0	0.02	0.15	0.87	0.710	1.510	3.205	70	160	560	10	15	10
150	0.4	-	-	0.02	-	-	0.760	-	-	75	-	-	10	-	-
152	0.4	0.9	2.0	0.02	0.15	0.82	0.770	1.635	3.470	76	170	610	10	15	10
160	0.5	0.9	2.0	0.02	0.15	0.80	0.880	1.715	4.055	80	180	640	10	15	10
180	0.5	0.9	2.0	0.02	0.10	0.70	0.990	1.720	4.570	90	210	810	10	15	10
200	0.5	-	2.0	0.01	-	0.60	1.100	-	5.070	100	-	1000	10	-	10
203	0.5	0.9	-	0.01	0.10	-	1.120	1.930	-	102	230	-	10	15	-
220	0.5	-	-	0.01	-	-	1.200	-	-	110	-	-	10	-	-
228	0.5	0.9	-	0.01	0.05	-	1.250	2.165	-	114	260	-	10	10	-
250	0.5	-	2.0	0.01	-	0.40	1.300	-	6.320	125	-	-	10	-	10
254	0.5	0.9	-	0.01	0.05	-	1.320	2.405	-	127	290	-	10	10	-
279	0.5	0.9	-	0.01	0.05	-	1.450	2.870	-	140	320	-	10	10	-
300	0.5	-	-	0.01	-	-	1.550	-	-	150	-	-	10	-	-
305	0.5	0.9	-	0.01	0.05	-	1.580	3.130	-	153	350	-	10	10	-
350	0.5	-	-	0.01	-	-	1.820	-	-	175	-	-	10	-	-
400	0.5	-	-	0.01	-	-	2.070	-	-	200	-	-	10	-	-